

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020744 A1

(51) International Patent Classification⁷: E02D 5/56, 5/80

(21) International Application Number:

PCT/AU2003/001125

(22) International Filing Date:

2 September 2003 (02.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2002951386 2 September 2002 (02.09.2002) AU
2002953298 12 December 2002 (12.12.2002) AU

(71) Applicant and

(72) Inventor: FRANCIS, Colin, William [AU/AU]; 22 Rosewall Street, Greystanes, NSW 2145 (AU).

(74) Agent: SPRUSON & FERGUSON; GPO Box 3898, Sydney, NSW 2001 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A PIER

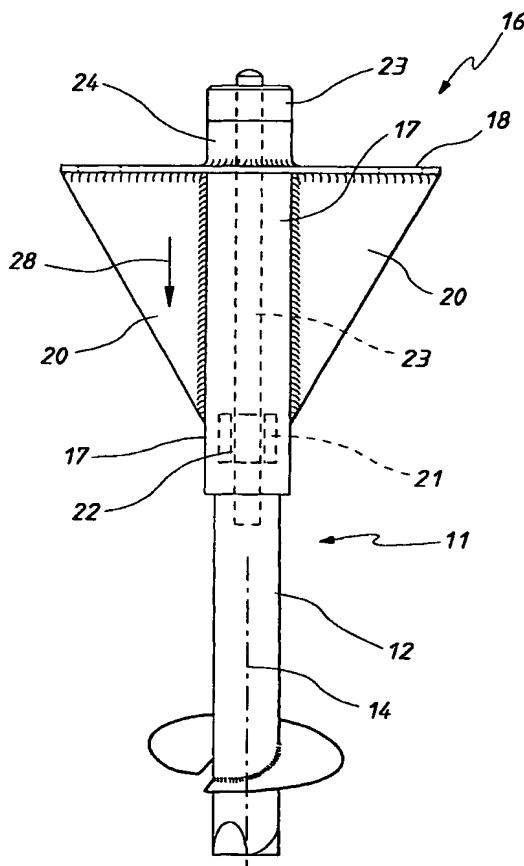

(57) Abstract: A pier (10) to be driven into a ground surface includes an auger member (11) having a shaft (12) that is rotated in a first direction to drive the auger member into the ground surface, and a compaction member (16) having a sleeve (17) surrounding a portion of the shaft. The compaction member (16) includes a compaction part (18) attached to and extending laterally outwardly of the sleeve (17). A threaded rod (23) engages the shaft (12) and is rotated to cause the compaction member (16) to move down the shaft (12) and compact the soil around the shaft.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.